
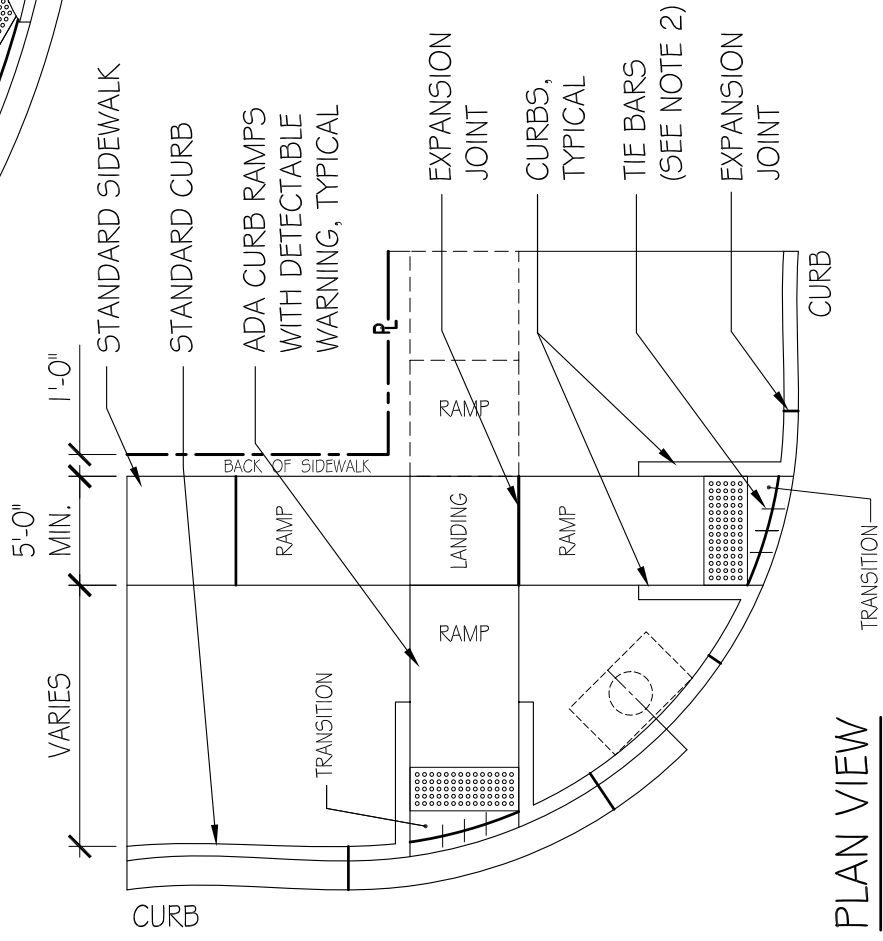


ISOMETRIC VIEW

NOT TO SCALE

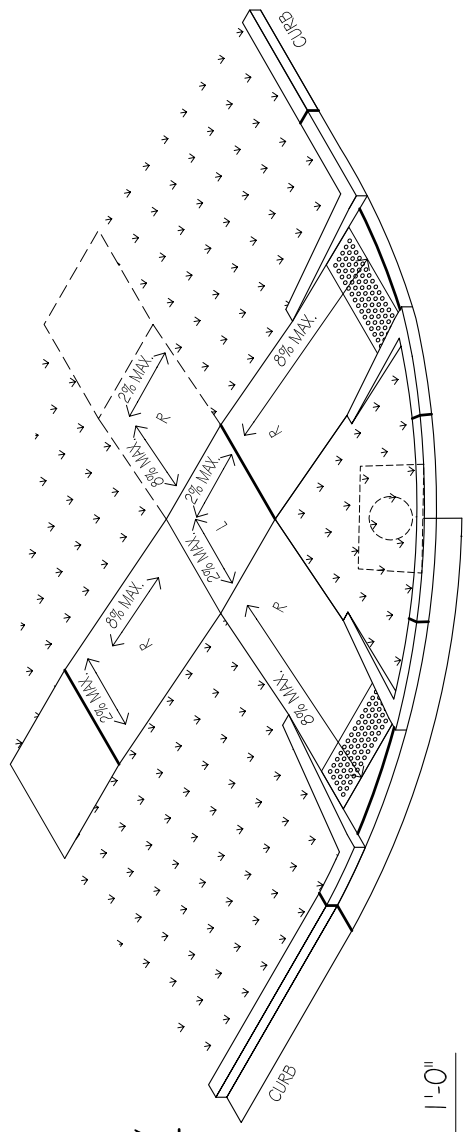

PLAN VIEW

NOT TO SCALE

NOTES:

1. ADA CURB RAMPS MUST COMPLY WITH PROWAG R302, R304, AND R305.
2. SIDEWALK / CURB RAMP LOCATION DETERMINED FROM THE INTERSECTION OF THE EXTENSION OF BACK OF SIDEWALK AND BACK OF CURB AND GUTTER.
3. KEY ALL CONSTRUCTION JOINTS OR USE TIE BARS #4 EPOXY COATED @ 12" O.C.
4. LONGITUDINAL JOINT SPACING TO MATCH WIDTH OF SIDEWALK.
5. EXPANSION JOINTS SHALL BE PLACED WHERE WALK ABUTS DRIVEWAYS AND SIMILAR STRUCTURES, AND 100' CENTERS MAXIMUM.
6. SIDEWALK / CURB RAMP SHALL BE LENGTHENED TO PROVIDE PROWAG COMPLIANCE SLOPE, OR AT LEAST 15', WHICHEVER OCCURS FIRST.
7. DETECTABLE WARNINGS TO COMPLY WITH PROWAG REQUIREMENTS.
8. LANDING FOR TYPE B RAMP ALONG THE ENTIRE CURB RETURN IS PREFERRED, BUT MAY BE SHORTENED TO MINIMUM PROWAG COMPLIANT DIMENSION.



**BOARD OF
PARKS AND
RECREATION
COMMISSIONERS**
CITY OF
KANSAS CITY, MISSOURI

4600 E. 63rd Street
Kansas City, MO 64130
Bus: (816) 513-7500
Fax: (816) 513-7605
Web: www.kcmo.org/parks

KCMO PARK'S STANDARD DETAILS

ARB
ADA CURB RAMP - TYPE B

DESIGNER: T. KIEFER
DATE: 10 APR 2013
ARCHIVE NO:

